

RE BIANCO



Il più bianco dei nostri roveri, uniforme e compatto, seducente e imperturbabile, avvolto nel suo niveo manto, è il sovrano di un regno d'alabastro, elegante e rarefatto.



Caratteristiche tecniche

Legno	Rovere
Spessore	15 mm
	Sp. lamella nobile 3,6 mm
Larghezza	158\192\240\ multilarghezze*
Lunghezza	1850\2000\2400 mm
	secondo disponibilità
Scelta	Senza nodi \ nodoso \ variegato
Retro	Abete\Rovere**
Provenienza	Comunità Europea
Classe di reazione al fuoco	Cfl-s1
Emissione formaldeide	E1 (<0,1ppm)
Conducibilità	0,15 W/mK
Resistenza termica	0,10 K/W
Peso	8,9 Kg/mq
Umidità	7%+ / -2%
Durezza	23-42 N/mm²

*Multilarghezze: 40% 158 mm, 40% 192 mm, 20% 240 mm. **Retro: standard in abete; in rovere su richiesta

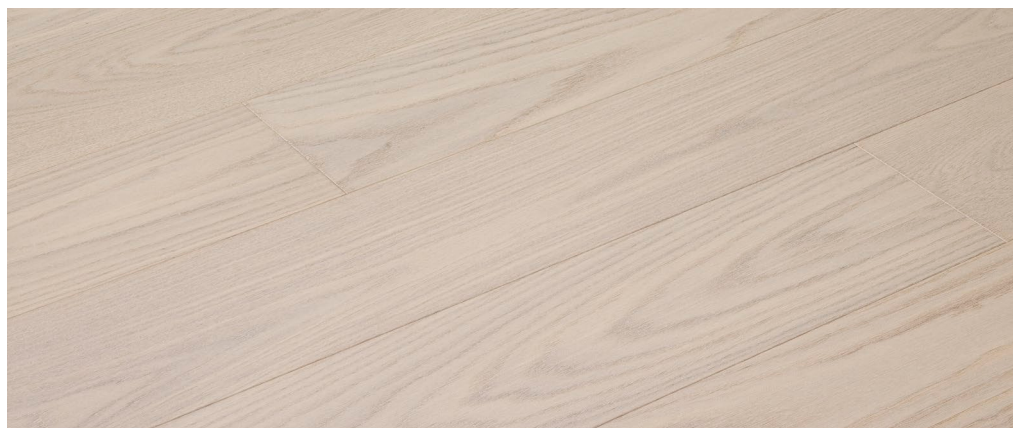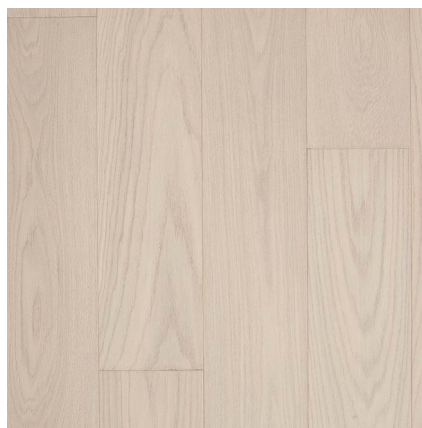

RE BIANCO



The whitest of our oak floors. Uniform and compact, charming and unflappable, enveloped in its snow-white coat, it is the king of an elegant and rarefied reign of alabaster.

Technical specific

Wood	Oak
Thickness	15 mm
	Th. top layer 3,6 mm
Width	158\192\240\multi-width*
Length	1850\2000\2400 mm
	according to availability
Selection	Knot-free\knotty\variegated
Back	Spruce\Oak**
Origin	European Union
Fire resistance class	Cfl-s1
Formaldehyde emission	E1 (<0,1ppm)
Conductivity	0,15 W/mK
Thermal resistance	0,10 K/W
Weight	8,9 Kg/mq
Humidity	7%+ / -2%
Hardness	23-42 N/mm²

*Multi-width: 40% 158 mm, 40% 192 mm, 20% 240 mm. **Back: in oak upon request

