

# PLATINO


*Il nome del metallo più prezioso per questo rovere che sembra bruciato dal sole e riaccessato dall'oliatura, in cui sfumature di nocciola e grigio si alternano a passaggi color tortora, con lampi biancastri che schiariscono nel tempo.*



## Caratteristiche tecniche

|                                    |                                 |
|------------------------------------|---------------------------------|
| <b>Legno</b>                       | Rovere                          |
| <b>Spessore</b>                    | 15 mm                           |
|                                    | Sp. lamella nobile 3,6 mm       |
| <b>Larghezza</b>                   | 158\192\240\ multilarghezze*    |
| <b>Lunghezza</b>                   | 1850\2000\2400 mm               |
|                                    | secondo disponibilità           |
| <b>Scelta</b>                      | Senza nodi \ nodoso \ variegato |
| <b>Retro</b>                       | Abete\Rovere**                  |
| <b>Provenienza</b>                 | Comunità Europea                |
| <b>Classe di reazione al fuoco</b> | Cfl-s1                          |
| <b>Emissione formaldeide</b>       | E1 (<0,1ppm)                    |
| <b>Conducibilità</b>               | 0,15 W/mK                       |
| <b>Resistenza termica</b>          | 0,10 K/W                        |
| <b>Peso</b>                        | 8,9 Kg/mq                       |
| <b>Umidità</b>                     | 7%+ / -2%                       |
| <b>Durezza</b>                     | 23-42 N/mm²                     |

\*Multilarghezze: 40% 158 mm, 40% 192 mm, 20% 240 mm. \*\*Retro: standard in abete; in rovere su richiesta

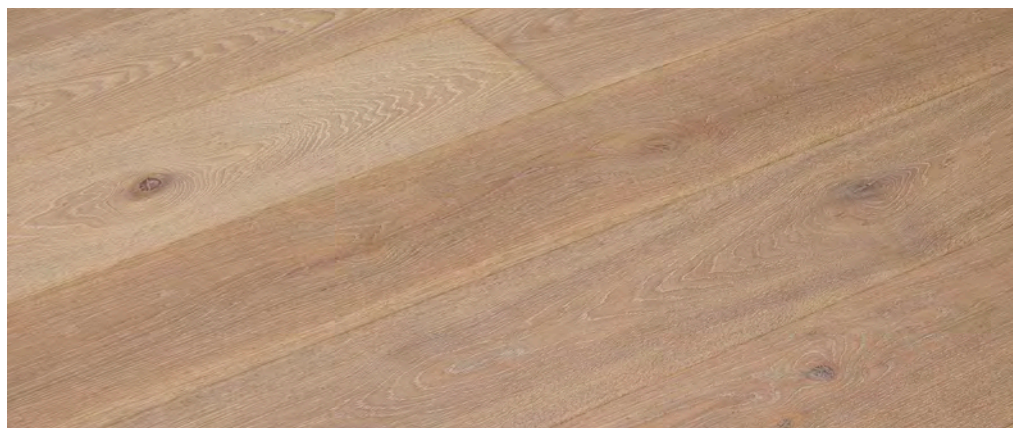



# PLATINO



*The name of the most precious metal describes this oak wood, as it looks like been burnt by the sun and reawakened by the oiling. The hazel and grey shades alternate with the dove-grey colour, with whitish flashes faded by the time.*

## Technical specific

|                       |                             |
|-----------------------|-----------------------------|
| Wood                  | Oak                         |
| Thickness             | 15 mm                       |
|                       | Th. top layer 3,6 mm        |
| Width                 | 158\192\240\multi-width*    |
| Length                | 1850\2000\2400 mm           |
|                       | according to availability   |
| Selection             | Knot-free\knotty\variegated |
| Back                  | Spruce\Oak**                |
| Origin                | European Union              |
| Fire resistance class | Cfl-s1                      |
| Formaldehyde emission | E1 (<0,1ppm)                |
| Conductivity          | 0,15 W/mK                   |
| Thermal resistance    | 0,10 K/W                    |
| Weight                | 8,9 Kg/mq                   |
| Humidity              | 7%+ / -2%                   |
| Hardness              | 23-42 N/mm²                 |

\*Multi-width: 40% 158 mm, 40% 192 mm, 20% 240 mm. \*\*Back: in oak upon request



**Boschi di Fiemme** | Platino | variegated and brushed