


PERLEPIETRA



Una tenue sbiancatura rivela nel rovere la natura della pietra, prezioso incontro tra il calore del legno e i freddi e cangianti grigi della roccia, attraversati da screziature più chiare, leggermente rosate.

Caratteristiche tecniche

Legno	Rovere thermowood
Spessore	15 mm
	Sp. lamella nobile 3,6 mm
Larghezza	154 o 188 mm
Lunghezza	1850/2000 mm
	secondo disponibilità
Scelta	Senza nodi o nodoso
Retro	Abete\Latifoglie
Provenienza	Comunità Europea
Classe di reazione al fuoco	Cfl-s1
Emissione formaldeide	E1 (<0,1ppm)
Conduttività	0,14 W/mK
Resistenza termica	0,10 K/W
Peso	8,5 Kg/mq
Umidità	5%+ / -2%
Durezza	46 N/mm ²

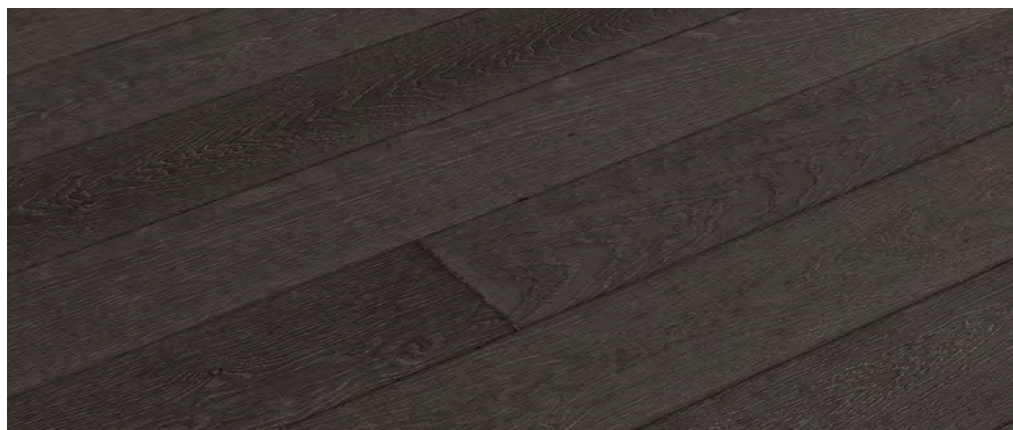

PERLEPIETRA



A feeble bleaching reveals the nature of the rock, a precious meeting between wood's glow and rock's cold and shimmering grey fades, crossed by clearer and slightly rosy variegations.

Technical specific

Wood	Oak
Thickness	15 mm
	Th.top layer 3,6 mm
Width	154 or 188 mm
Length	1850/2000 mm
	according to availability
Selection	knot-free or knotty
Back	Spruce
Origin	European Union
Fire resistance class	Cfl-s1
Formaldehyde emission	E1 (<0,1ppm)
Conductivity	0,14 W/mK
Thermal resistance	0,10 K/W
Weight	8,5 Kg/mq
Humidity	5%+ / -2%
Hardness	46 N/mm ²

